



- WOOD CHIP RETAINING NOTES:**
- ALL BASKETS TO BE SURROUNDED BY 30± DIAMETER, 2" THICK LAYER OF BULK WOOD CHIP MULCH EXCEPT HOLES 4 & 5. HOLES 4 & 5 TO BE USED AS TRIAL STUDY OF ALTERNATIVE WOOD CHIP RETAINING SYSTEMS
 - HOLE 4 - INSTALL BEND-A-BOARD RETAINING SYSTEM PER DETAILS BELOW.
 - HOLE 5 - DIG 3" WIDE TRENCH SURROUNDING BASKET @ 30' DIAMETER WITH NO RETAINING EDGE SYSTEM

BEND-A-BOARD INSTALLATION GUIDE


- 1** DIG DOWN INTO THE GROUND EXPOSE AS LITTLE BOARD AS POSSIBLE
3/4" MAXIMUM RECOMMENDED THIS REDUCES THERMAL EXPANSION

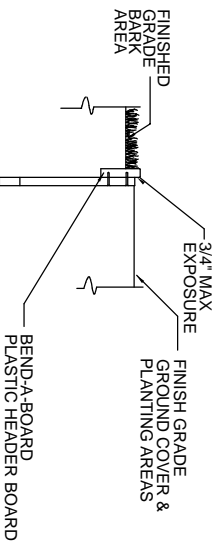

- 2** INSTALL STAKES EVERY 3' 0" USING PLATED SCREWS

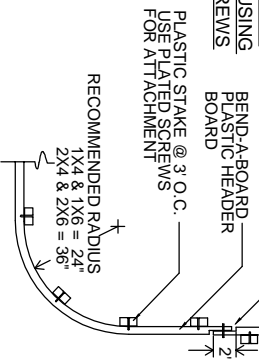


- 3** SECURE SLIP-JOINT USING TWO STANDARD STAKES MOUNTED ON OPPOSING SIDES LEAVING A GAP FOR THERMAL EXPANSION

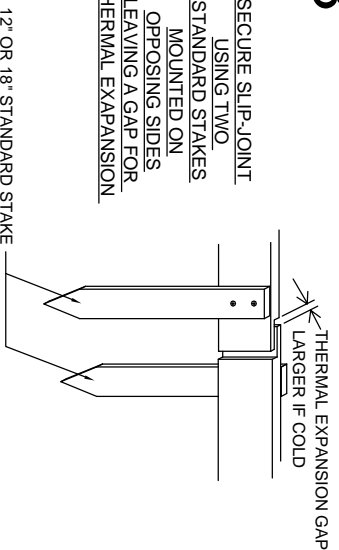

BEND-A-BOARD CHART

	ACTUAL DIMENSIONS	MINIMUM RADIUS POSSIBLE	MAXIMUM CROWN POSSIBLE
1½X4	3" X 5/16" X 20'	6"	22" / 20'
1X4	3 3/8" X 1/16" X 20'	24"	19" / 20'
2X4	3 3/8" X 1 3/8" X 20'	36"	16" / 20'
1X6	5 3/8" X 1 1/16" X 20'	24"	9" / 20'
2X6	5 3/8" X 1 3/8" X 16'	36"	N/A



SEE CHART FOR MAX. CROWN LENGTH & HEIGHT

NOTES:

1. COLOR BROWN
2. USE COARSE WOOD WORKING TOOLS FOR CUTTING & DRILLING
3. USE PLATED SCREWS TO JOIN BOARD TO STAKE
4. STAKE APPROX 3' 0" OC


SLIP JOINTS MUST BE ABLE TO EXPAND AND CONTRACT AS TEMPERATURES CHANGE. ALWAYS INSTALL WITH THE GAP SPECIFIED BELOW.

- 1X4 @ 1" - 1" 2X4 @ 1" - 3"
- 1X6 @ 1" - 3" 2X6 @ 3" - 1"

WARM WEATHER INSTALL MIN GAP
COLD WEATHER INSTALL MAX GAP

RECOMMENDED GAP SETTING
AT THE SLIP JOINT IS BASED ON PLASTIC THERMAL EXPANSION.

**DO NOT SCREW THROUGH THE
SLIP JOINT**



SAN FRANCISCO
DISC GOLF

GOLDEN GATE DISC GOLF COURSE

**GREEN WOOD CHIP
RETAINING SYSTEM**

DATE: SEPTEMBER 2006

SCALE: AS NOTED